

2298 GM

MARTIN-HORN®
... das Original!

Safety in action

**MARTIN-HORN® for fire brigade, rescue vehicles
and special vehicles**



4 diaphragm acoustic horn with Tremolo effect

DEUTSCHE SIGNAL-INSTRUMENTEN-FABRIK
Max B. Martin GmbH & Co. KG



MARTIN-HORN® 2298 GM

TRADITION

The company Deutsche Signal-Instrumenten-Fabrik Max B. Martin had already developed in 1932 together with the fire and police services a siren which was legally prescribed as a special signal for prioritised road users (legislator: "Warning device with a series of tones of different frequencies"). Every special signal device on German police and fire service vehicles before 2nd World War was actually a MARTIN-HORN®.

The registered tradename MARTIN-HORN® refers to sirens which use one or more tones to form a warning signal. The genuine MARTIN-HORN® is recognised by its penetrating, trumpetlike tones.

The MARTIN-HORN® 2298 GM is characterised by the 4 diaphragm acoustic horns with tremolo tuning for additional warning effect. Special designs with other types of tuning and rhythm are available.

FEATURES

4 diaphragm acoustic horns, tuned a' a' / d'' d'' (435 + 450/580 + 600 Hz), 1 electrical blower with 12 or 24 V DC, with mounting base, automatic valve and switching mechanism and interference suppression capacitor

Normal accessories:

2 connection hoses each 1 m long (longer on request) with retaining screws and 2 manifolds, 1 set of connecting leads, 1 relay, 1 can of special oil, 1 toggle switch, 1 installation manual

Special accessories:

Snow protection caps

ADVANTAGES OVER 2297 GM:

- less weight! (approx. 1000 g)
 - 40 % less mounting volume
 - less engine noise
- at the same power!**

When ordering, please indicate the operating voltage!

DEUTSCHE SIGNAL-INSTRUMENTEN-FABRIK

Max B. Martin GmbH & Co. KG

Albert-Schweitzer-Straße 2 · 76661 Philippsburg

www.maxbmartin.de

Contact us at:

Phone: 07256 920-0

Telefax: 07256 8316

Email: info@maxbmartin.de

Additional data

Article No. 2298 GM

Additional warning effect by tremolo tuning.

Current consumption approx. 240 W

Volume: 125 dB(A)

at a distance of 1 m,



DIN 14610 EG

DIN B 03

ECE E1 10R- 047016



4 diaphragm acoustic horns, tuned a'a' / d''d''

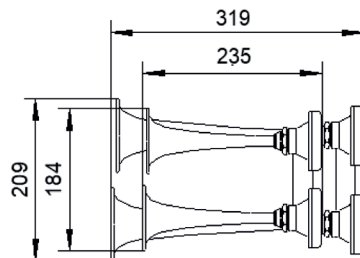

If snow caps are used, the overall length of the acoustic horns is increased by 30 mm.

